


PAC H108 E 350HP

Qmax 6,400 USgpm - Hmax 360 ft

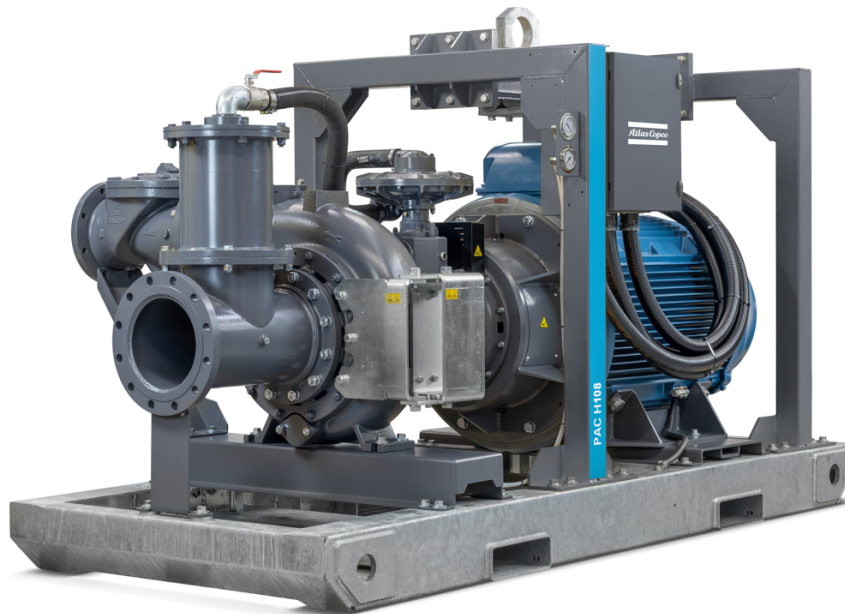

Indicative picture of the product

PAC Head series

The pump system consists of a centrifugal pump and a separator, which enables air to be separated from the liquid and be sucked by a vacuum pump - making automatic priming possible. Even with suction heights of several feet the machine rapidly evacuates the air from the suction pipe and starts to pump. Additionally, thanks to the enclosed impeller, the PAC range is also suitable for pumping liquids with solids in suspension with best possible efficiency.

Applications

The PAC H108 Atlas Copco pump is designed to withstand toughest applications and delivers best in class pumping efficiency. One of the most common area of utilization is the mining and Oil & Gas segment where reliability, efficiency and versatility is the key to provide a customized solution. Other suitable applications within Construction and General dewatering, Municipal as well as General Industry are ideal for the PAC H108 pump. Atlas Copco pumps are packed with features that not only meet, but exceed the needs of our customers.

Benefits

Efficiency

The 17" impeller with 82% efficiency at B.E.P. provides best pumping result with minimal efforts

Solids handling

Closed impeller type with solids handling capability of 3.5" for trouble free operation

Serviceability

Semi cartridge seal and bolted front wear ring for easy service

PAC H108 E 350HP




Performance curves

Test according to UNI EN ISO 9906 standard - level 2

Test liquid: clean water, density 62.43 lb/ft³ (8.345 lb/gal)

Losses from priming system and check valve not included

Speed	Impeller Dia.	Style	Solids Dia.	Ns	Suction	Discharge	No. Vanes
Various	17" / 440 mm	Enclosed	3.5" / 89 mm	1800 rpm	10" / 250 mm	8" / 200 mm	2

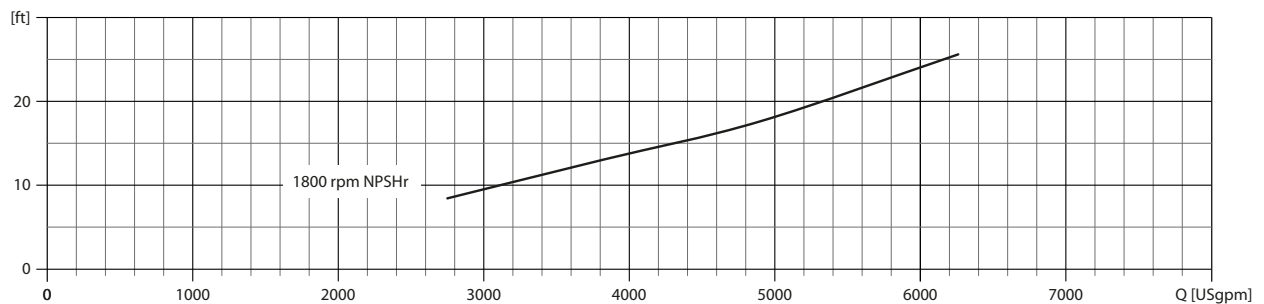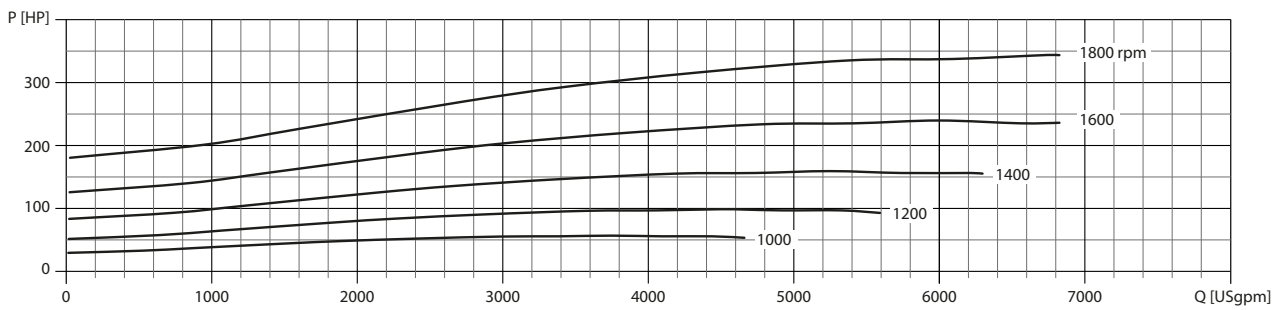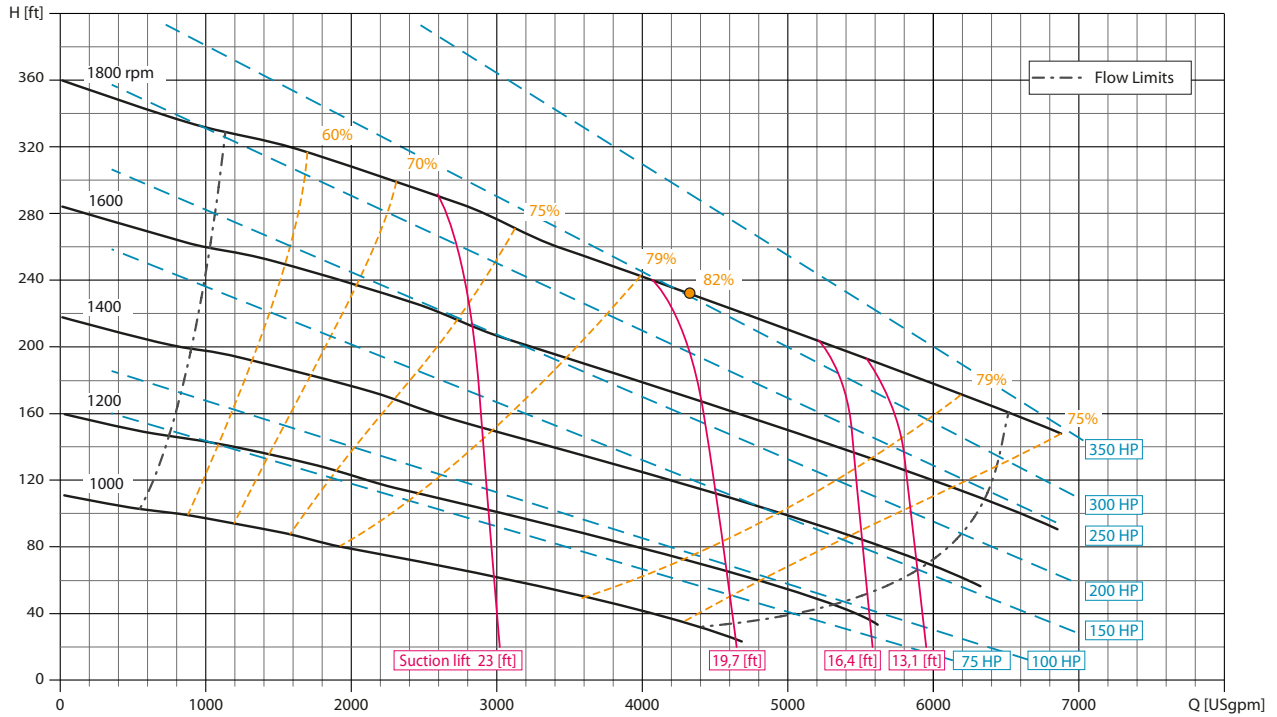

PAC H108 E 350HP

Technical data

Pump

Model	PAC H108	
Qmax	6,400 USgpm	
Hmax	360 ft	
Q max eff.	4,270 USgpm	
Eff. max	82 %	
Suction port	10" Flange - ANSI class 250	
Delivery port	8" Flange - ANSI class 200	
Impeller type	Closed, 2 vane	
Impeller diameter	17"	
Solids handling	3.5"	
Material	Standard	Stainless Steel (option)
Casing	ASTM A536 ductile iron	CD4MCu
Impeller	ASTM A743 CA6NM	CD4MCu
Wear ring	ASTM A48 Class 20 grey iron	PTFE
Wear plate	ASTM A48 Class 20 grey iron	AISI 316L stainless steel
Shaft	AISI 630 stainless steel	AISI 630 stainless steel
Mechanical Seal faces	Silicon carbide / Silicon carbide / VITON	Silicon carbide / Silicon carbide / VITON
Elastomers	NBR + VITON	VITON
Lubrication	Grease (bearings)	Grease (bearings)
Check Valve	ASTM A536 ductile iron + NBR rubber flap	AISI 316 stainless steel + Viton flap
Separator	Aluminium alloy	AISI 316 stainless steel

Motor

Make	WEG
Type	Three Phase Induction
Cooling method	IC411 - TEFC
No. poles	4
Tension supply	460 V
Frequency	60 Hz
Rated power	350 HP
Rated speed	1,784 rpm
Rated current	384 A
Efficiency class	W22 NEMA premium efficiency
Max efficiency	IPW55
Protection rating	F
Insulation class	Continuous - S1
Thermal protection	96,2 %
Duty cycle	Thermistors 2 Wires - 311degF

Priming system


Vacuum pump	
Vacuum pump type	Diaphragm
Nominal air capacity	50 cfm
Max vacuum	- 26.6 inHg
Drives	Link belt

Arrangement

Technical data	
Material	ASTM A36 steel - Frame, supports and Lifting Beam
Coatings	Epoxy powder, average thickness of 3 MIL
Features	Lifting beam. Fork lift pockets. Pump access through hinged door. 8 x 400 amp male cam-lock receptacle.
Dry weight	7,352 lbs

Dimensional drawing

in [mm] indicative dimension of the product

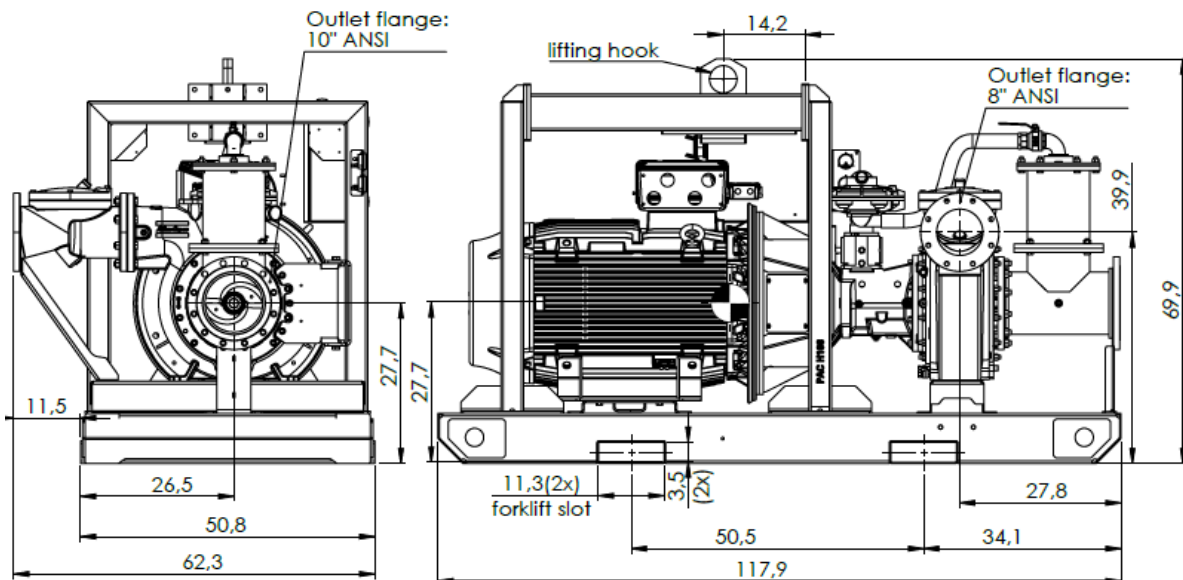

DATA SHEET

Three Phase Induction Motor - Squirrel Cage



Customer : WEG BENELUX S.A.

Product line : W22 Tru Metric - IE3 NemaPremium Efficiency
(Derating)

Frame	: 315L	Locked rotor time	: 38 s (hot) 68 s (cold)
Output	: 350 HP (260 kW)	Temperature rise	: 80 K
Poles	: 4	Duty cycle	: S1
Frequency	: 60 Hz	Ambient temperature	: -20 °C to +40 °C
Rated voltage	: 460 V	Altitude	: 3280 ft
Rated current	: 384 A	Protection degree	: IPW55
L. R. Amperes	: 3034 A	Cooling method	: IC411 - TEFC
LRC	: 7.9 Code H	Mounting	: B35T
No load current	: 152 A	Rotation ¹	: Both
Rated speed	: 1790 rpm	Noise level ²	: 77.0 dB(A)
Slip	: 0.56 %	Vibration class	: A
Rated torque	: 1392 Nm	Starting method	: Direct On Line
Locked rotor torque	: 350 %	Coupling	: Direct
Pull up torque	: 295 %	Approx. weight ³	: 3523 lb
Breakdown torque	: 340 %	Painting plan	: 203A
Insulation class	: F	Color	: RAL 5009
Service factor	: 1.25	Design	: N
Moment of inertia (J)	: 199 sq.ft.lb		

Output	50%	75%	100%	Load type	: -
Efficiency (%)	95.4	96.2	96.2	Load torque	: -
Power Factor	0.71	0.81	0.85	Load inertia (J=GD ² /4)	: -

	Drive end	Non drive end	Foundation loads	
Bearing type	6319-C3	6316-C3	Max. traction	: 28931.0 N
Lubrication interval	8000 h	10000 h	Max. compression	: 44605.8 N
Lubricant amount	45 g	34 g		
Lubricant type	MOBIL POLYREX EM			

Notes

Standards	Specification	: MG1 - Part 20	Vibration	: MG1 - Part 7
	Test	: MG1 - Part 20	Tolerance	: MG1 - Part 12
	Noise	: MG1 - Part 9		

This revision replaces and cancel the previous one, which must be eliminated.
 (1) Looking the motor from the shaft end.
 (2) Measured at 1m and with tolerance of +3dB(A).
 (3) Approximate weight, subject to be changed after manufacturing process.
 (4) At 100% of full load.

These are average values based on tests with sinusoidal power supply, subject to the tolerances stipulated in IEC 60034-1.



Rev.	Changes Summary		Rev.	Checked	Date
Performed by	weiss		1284942862		
Checked by	AUTOMATICO		Page	Rev.	
Date	23/06/2022		1 / 1	0	

1 2 3 4 5 6

A

B

C

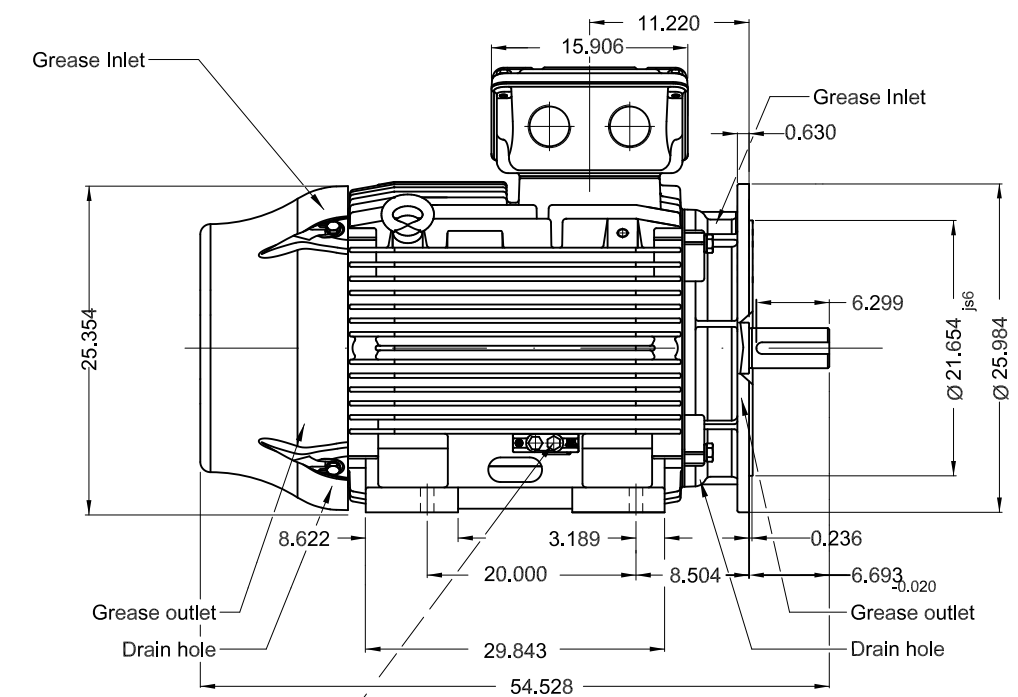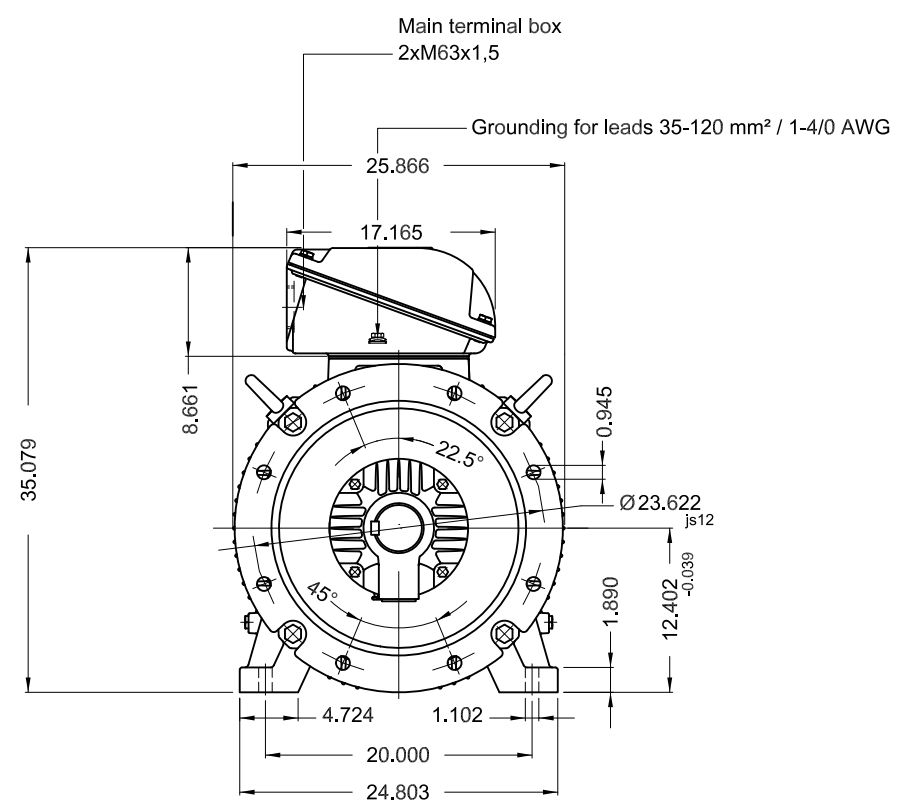


Grounding for leads 25-185 mm² / 3AWG-350MCM

D

E

NDE endshield with electrically insulated bearing hub
 Color RAL 5009
 Painting plan 203A
 Mounting B35T



350 HP 04 Poles 60 Hz A

WEG BENELUX S.A.

ECM	LOC	SUMMARY OF MODIFICATIONS	EXECUTED	CHECKED	RELEASED	DATE	VER
EXECUTED	PIRWUSER	THREE PH. MOTOR W22 IE3					
CHECKED		FRAME 315L IPW55 TEFC					
RELEASED							
REL DT.	WMO	Jaragua do Sul	Product Engineering				

PREVIEW
 WDD



SHEET 1 / 1